



# CSI/JEWETT

## MODEL CWC

### WARMING CABINETS

**CWC Single Cabinet**



**CWC Double Cabinet**



#### **Standard Features:**

- Stainless Steel Construction
- Individual Temperature Control Per Cabinet
- LED Temperature Display And Set Point
- Fan Forced Hot Air Convection Over Electric Heating Element
- Fully Insulated Cabinet Walls And Doors
- Silicone Door Gaskets
- Positive Door Latches
- Leveling Feet
- Automatic High Limit Temperature Cutout And Reset
- Doors Hinged Left Or Right
- UL Listed
- Available Options
  - Casters
  - Audible Alarm— High and Low Temperature
  - Tempered Safety Door Glass Doors
  - Seismic Anchoring
  - Stainless Steel Trim
  - Hospital Grade Power Cord
  - Additional Shelves

# CWC Model Specifications


Operating Internal Temperature Range: 90°F -160°F (32°C –71°C)

Electrical:

- 120 volt, 60 Hz, 6 A: CWC-15, -28, -41
- 120 volt, 60 Hz, 12 A: CWC-61, -1515, -1528, -1541, -2828

Operating Conditions:

- 32-122°F (0-50°C)
- 0-90% Humidity Non-condensing

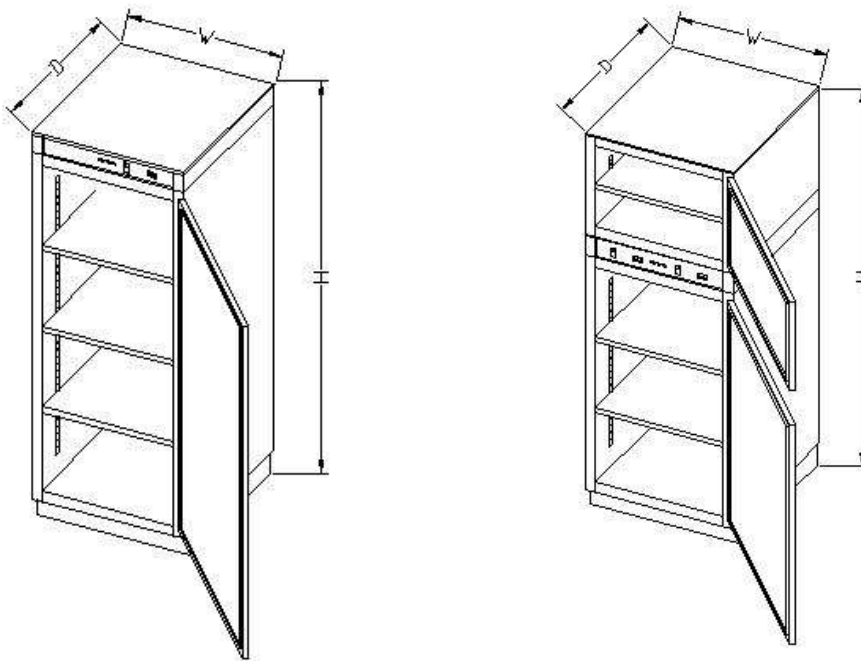

| Model    | Exterior Cabinet Dimensions |     |     |       | Interior Chamber Dimensions |       |       | Interior Volume<br>cu ft | Weight<br>lbs |
|----------|-----------------------------|-----|-----|-------|-----------------------------|-------|-------|--------------------------|---------------|
|          | W                           | D   | H   |       | W                           | D     | H     |                          |               |
| CWC-15   | 30"                         | 24" | 28" |       | 25.5"                       | 17.5" | 15.5" | 4 ft <sup>3</sup>        | 152           |
| CWC-28   | 30"                         | 24" | 41" |       | 25.5"                       | 17.5" | 28.5" | 7.4 ft <sup>3</sup>      | 211           |
| CWC-41   | 30"                         | 24" | 54" |       | 25.5"                       | 17.5" | 41.5" | 10.75 ft <sup>3</sup>    | 263           |
| CWC-61   | 30"                         | 24" | 74" |       | 25.5"                       | 17.5" | 61.5" | 15.9 ft <sup>3</sup>     | 510           |
| CWC-1515 | 30"                         | 24" | 48" | UPPER | 25.5"                       | 17.5" | 15.5" | 4 ft <sup>3</sup>        | 310           |
|          |                             |     |     | LOWER | 25.5"                       | 17.5" | 15.5" | 4 ft <sup>3</sup>        |               |
| CWC-1528 | 30"                         | 24" | 61" | UPPER | 25.5"                       | 17.5" | 15.5" | 4 ft <sup>3</sup>        | 363           |
|          |                             |     |     | LOWER | 25.5"                       | 17.5" | 28.5" | 7.4 ft <sup>3</sup>      |               |
| CWC-1541 | 30"                         | 24" | 74" | UPPER | 25.5"                       | 17.5" | 15.5" | 4 ft <sup>3</sup>        | 414           |
|          |                             |     |     | LOWER | 25.5"                       | 17.5" | 41.5" | 10.75 ft <sup>3</sup>    |               |
| CWC-2828 | 30"                         | 24" | 74" | UPPER | 25.5"                       | 17.5" | 28.5" | 7.4 ft <sup>3</sup>      | 422           |
|          |                             |     |     | LOWER | 25.5"                       | 17.5" | 28.5" | 7.4 ft <sup>3</sup>      |               |